

GSSI GROUP

LED GREENLIGHTING


Save Energy . . . Save Money . . . Save the Earth

PAR30-F-DIM



Specifications and Characteristics

Lighting	
Luminaire:	112 LEDs
Rated Lumens:	450
Correlated Color Temperature (CCT)	5000~6000 k (Cool White)
	4000~4500 k (Pure White)
	3000~3500 k (Warm White)
Color Rendering Index (CRI)	Ra > 80
Photometry:	Type C
Warranty:	5 Years, 50000 hrs.
Electrical	
Total Watts:	6.5
Rated Voltage:	120~277V
IP Rating:	65
Certification	UL, TUV, GS, CE, RoHS
Environmental	
Temperature Range Ambient:	-30°C ~ 50°C
Humidity Range	10% ~ 90% relative humidity
Packing Information	
Dimension:	3.85" dia. X 5.26"
Net Weight:	9.2 oz.
Pieces per carton:	12

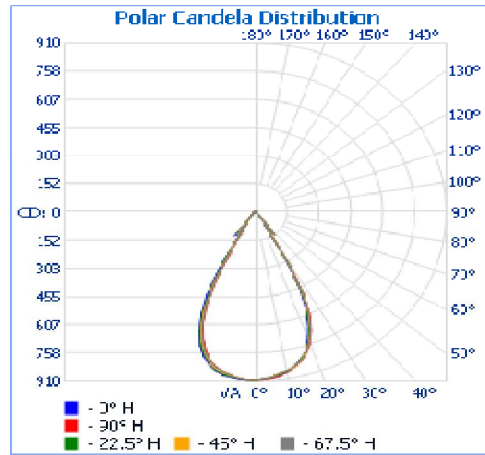





Flood Summary				
	Efficiency	Lumens	Spread	
			Horizontal	Vertical
Field (10%):	90.9%	409.0	66.1	64.8
Beam (50%):	73.7%	331.7	54.8	55.8
Total:	100.0%	450.0		

GSSI GROUP

LED GREENLIGHTING

Save Energy . . . Save Money . . . Save the Earth

PAR30-F-DIM

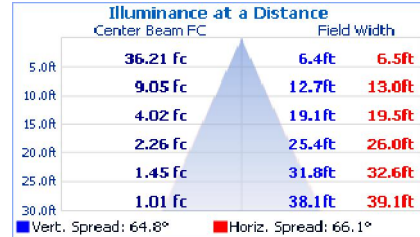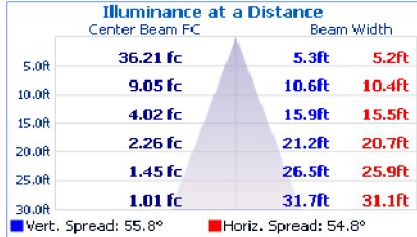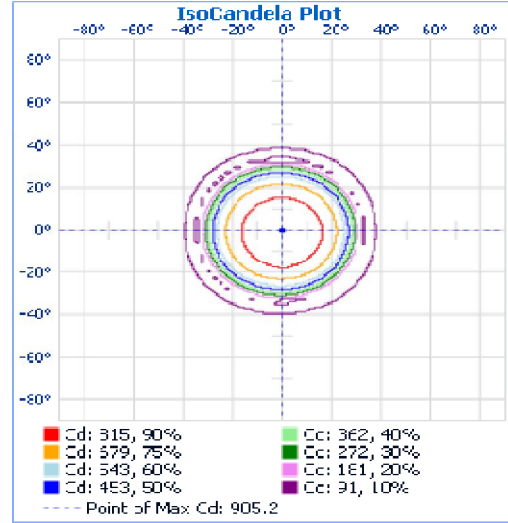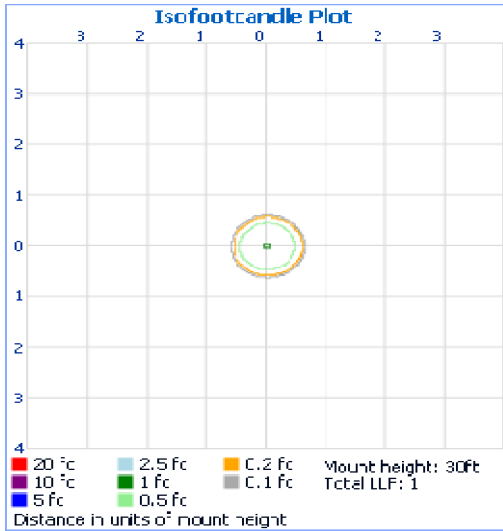

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	54.5	12.1%	90-100	0.0	0.0%
10-20	149.0	33.1%	100-110	0.0	0.0%
20-30	161.6	35.9%	110-120	0.0	0.0%
30-40	49.1	10.9%	120-130	0.0	0.0%
40-50	14.9	3.3%	130-140	0.0	0.0%
50-60	8.6	1.9%	140-150	0.0	0.0%
60-70	5.9	1.3%	150-160	0.0	0.0%
70-80	4.1	0.9%	160-170	0.0	0.0%
80-90	2.7	0.6%	170-180	0.0	0.0%

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Luminaire
0-30	364.5	81.0%	81.0%
0-40	414.0	92.0%	92.0%
0-60	437.0	97.1%	97.1%
60-90	13.1	2.9%	2.9%
0-90	450.0	100.0%	100.0%
90-180	0.0	0.0%	0.0%
0-180	450.0	100.0%	100.0%

Efficiency Total: 100.0%